

• 140 LpW

• Glare-Free, UGR <19

• IP67

With Enhanced Glare-Free Illumination and various popular Beam Spreads, AEON Provides Crisp Illumination, avoiding any Visual Discomfort. AEON's Proprietary Optics produce the Ideal Light Distribution and Beam Spreads for Variety of Indirect Lighting applications, while saving you up to 65% in Energy use compared to Traditional Lighting.

AEON delivers Simple, Smart and Easy-to-use Indirect Lighting Solutions that provide Advanced Functionality, Versatility and Operational Efficiency.



The Most Efficient, Versatile and the Most Powerful LED Indirect Lighting Luminaires in the Industry!

5 Popular Lumen Packages:

230W: 33,100lm (~500W HID)


310W: 44,100lm (~750W HID)

440W: 62,100lm (~1000W HID)

520W: 73,500lm (~1500W HID)

750W: 105,000lm (~2000 HID)

Designed, Engineered &



Assembled in the USA



Proprietary & Patented Designs!

Illuminating facts about High Performance AEON™ LED Luminaires Better for your Eyes, Better for the Planet.

What makes the AEON™ Indirect Lighting Luminaires your Lighting Solution of Choice?

- The most powerful Indirect Lighting Luminaire with the Highest Reliability Level: Incredibly High 95% Total Efficiency and with the Highest Efficacy in its own Class: Up to 140 Delivered LpW. More Light with Fewer Fixtures.
- Heavy-duty, Lightweight and Durable Die-Cast Design for High Wear Resistance: Withstands Harsh, Extreme Outdoor Conditions and Corrosive Environments.
- Proprietary Thermal Efficient Design with Passive Cooling Maximizes Heat Dissipation for Longer Life of the Luminaire. Designed for Greater Life Expectancy in Warmer Climates.
- State-of-the-Art, Aesthetically Pleasant Compact Design with No Exposed Electronics or Wiring. Rugged, Weather-tight Design. IP67 Rated for Wet location.
- Patented Aerodynamic Convection Design for Longer Life of LED Package and Electronics and for Minimal Wind Resistance.
- Multiple Mounting Options: Pendant, Loop or Yoke Mount.
- Multiple Beam Spreads allows for Optimized Configuration for Different Applications.
- Proprietary Glare-Free Illumination: No Visual Discomfort. UGR <19.
- Precise, Custom-engineered Optics with Controlled Intensity and Uniformity: Maintains Consistent Delivered Foot Candles over the Luminaires life.
- High Color Rendition showing True Colors: CRI >85.
- Proprietary Design offers Uniform and Constant Light Levels throughout the Life of the Luminaire with Minimal Lumen Depreciation.
- Optical Accuracy. Directs Light precisely where needed without any Spillage.
- Technology within the Fixture: No Outside Exposure to any Sensitive Electronic Components.
- Adaptable to Various Intelligent Lighting Controls: Wired or Wireless.
- Ultra-Low EMI eliminates Electrical Interference with surrounding Electronic Systems.

SAVE UP TO

65%
ON YOUR
ENERGY COSTS



Contract
47QSWA20D0040



98%
RECYCLABLE




NO
LEAD, MERCURY, TOXIC
GASES OR HEAVY METALS



AEON Model	Watts	Delivered Lumens	HID Equivalent	Energy Savings*	Input Line Current (A)				Net Weight	EPA (Sq. Ft.)
					120V	277V	347V	480V		
HL-AF-230WD	230W	33,100	500W	54%	2.1A	0.9A	0.7A	0.5A	29 lbs.	1.6
HL-AF-310WD	310W	44,100	750W	59%	2.8A	1.2A	1.0A	0.7A	34 lbs.	1.6
HL-AF-440WD	440W	62,100	1000W	56%	3.9A	1.7A	1.4A	1.0A	44 lbs.	2.2
HL-AF-520WD	520W	73,500	1500W	65%	4.6A	2.0A	1.6A	1.2A	48 lbs.	2.2
HL-AF-750WD	750W	105,000	2000W	63%	6.7A	2.9A	2.3A	1.7A	66 lbs.	3.0

- Rugged, Durable and Compact Luminaire stands up to the most demanding Elements and is Excellent for use in Hot & Humid Climates and Suitable for use in Corrosive Environments.
- UV Stabilized Electrostatic Finish and Stainless Steel Hardware to withstand Extreme Outdoor Conditions.
- No Light Spillage.
- Incredibly Long-Life Span of over 100,000 Hours.
- Simple, Reliable, and Affordable, Maintenance-free Design.
- Advanced Functionality and User Friendly with Quick Connect System: Lenses, Modules and Drivers are Field-Changeable.
- Solid-State: No Moving Parts. Ideal for High Vibration Areas (ANSI C136.31, 3G Rated).
- Standard Included: Instant On/Off, Continuous Dimming, 10 ft. Prewired Sheathed Cord, Hoist Hook and 3.3 ft (1m) Stainless Steel Safety Cable.
- 10kA / 20kV Inline Surge Protection against Over Voltage, Short Circuit, and Over Temperature.
- Suitable for Ambient Temperatures: -40°F~+122°F (-40°C~+50°C).
- RoHS Compliant: No Lead, Mercury, Toxic Gases or any Hazardous Materials. Facilitates LEED® points.
- Environmentally Friendly: 98% Recyclable.
- Save Labor Cost Significantly: Quick & Easy Installation Process.
- Lowest Total Cost of Ownership. Shortest Payback Period and a High ROI.
- Meets/Exceeds National and International Standards.

* Does not include Ballast Loss, Maintenance, Replacement Lamp Savings and Disposal Costs which amount to an additional Savings of 30~50%!

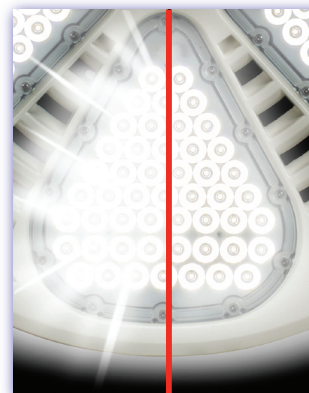

Standard LED Optics

AEON™
Proprietary
Glare-Free
LED Optics

2-for-1
Replacement.
More Light
Less
Luminaires

SAVE UP TO
83%
ON YOUR
ENERGY COSTS

Multi-Voltage
Options

120-277VAC / 347-480VAC



Ordering Nomenclature:

HL	—	AF	—	520WD	—	50K	—	N4	—	277V	—	WH	—	PCK-7
COMPANY		SERIES		WATTS		CCT		BEAM TYPE		VOLTAGE		COLOR		OPTIONS
				230WD		30K = 3000K		N2		277V = 120V-277V		WH = White		See Options, below
				310WD		40K = 4000K		N3		480V = 347V-480V		BZ = Bronze		
				440WD		50K = 5000K		N4				GY = Gray		
				520WD				N5				BK = Black		
				750WD				N6						
						Important Note:						Important Note:		
						Standard CCT: 5000K						Standard Color: Signal White (WH)		
						3000K & 4000K available						Other Colors available as		
						as "Special Order" only						"Special Orders" only and		
						and with Longer Lead Times						with Longer Lead Times		

Note

750W is not available in
Pendent or Loop Mount


Options:

YB-2331 High Mast / Indirect Lighting Yoke Bracket for 230W-310W
YB-4452 High Mast / Indirect Lighting Yoke Bracket for 440W-520W
YB-7500 High Mast Yoke Bracket for 750W
PCK-7 Photo Control Receptacle Kit Only (Photocell not included)


MA-1270F Indirect Lighting Mount Adapter, 3/4NPT
LM-1840 Indirect Lighting Loop Mount Assembly
PMA-1230B Pendant Mount Adapter, 3/4NPT
HMA-34NPT Hook Mount Adapter, 3/4NPT

As part of the company's continuous product improvement program, HyLite reserves the right to change materials or modify the design of its product without notification. All Specifications subject to change without notice. All values are design and/or typical values when measured under laboratory conditions. Actual Values depend upon the ambient temperature of the installation location. Please consult factory for your specific requirements.

230WD / 310WD

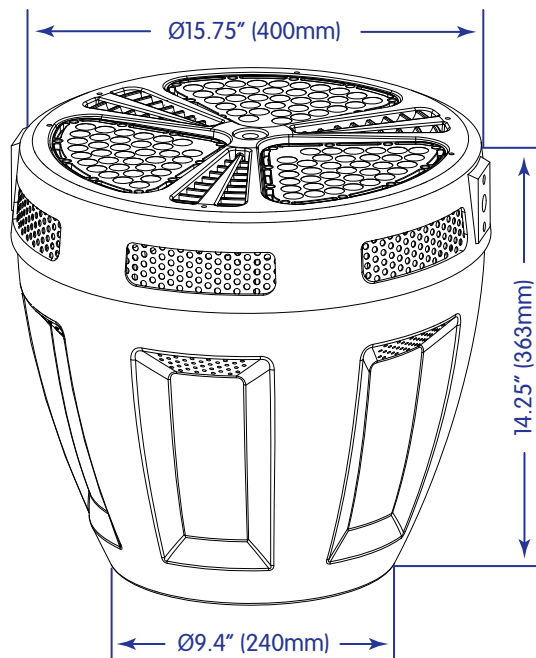

440WD / 520WD

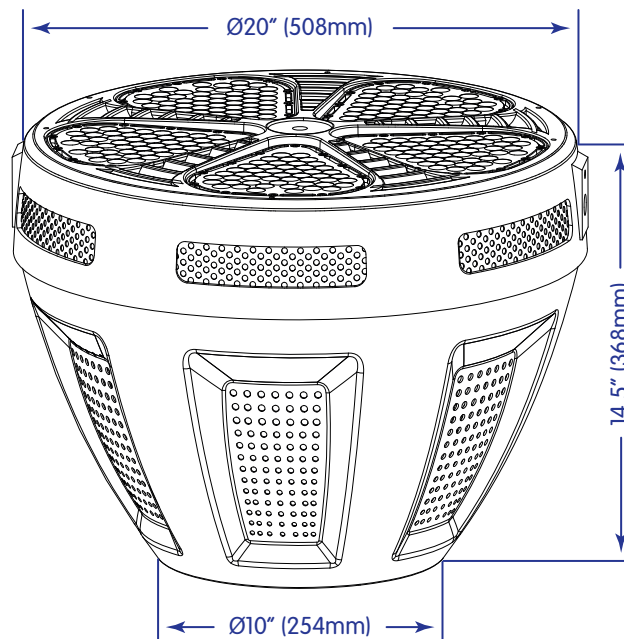

750WD

